




**CHARACTERISTIC CURVES**  
*Models: TXD2, TXSD2, TXDI2*


Page Number	201-023
Effective	May 2016
Replaces	Oct 2001
Section	201

**FLOW AT 50 PSI (3.45 Bar)**

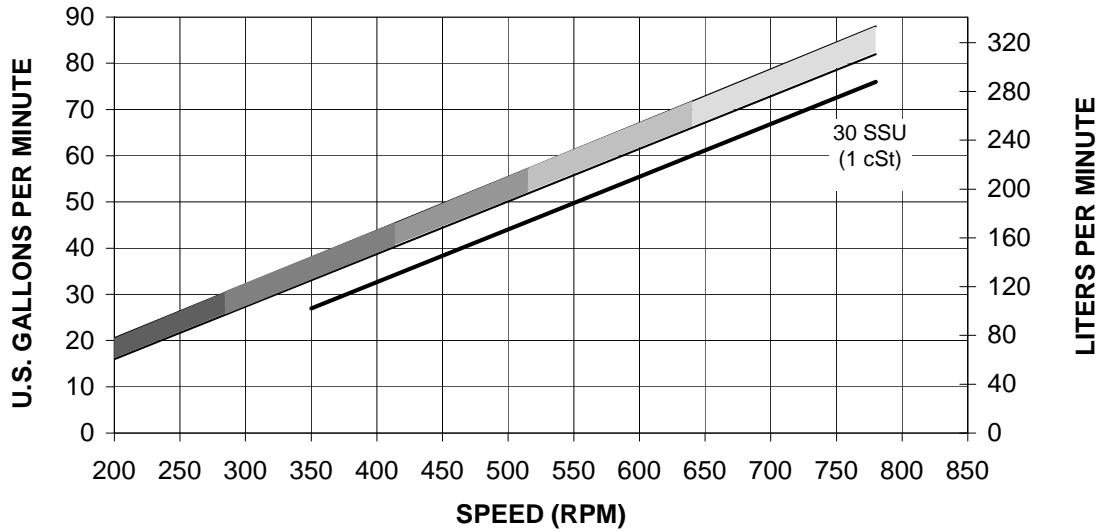

 100 - 20,000 SSU (22 - 4,250 CS) 280 RPM MAX. SPEED	 100 - 10,000 SSU (22 - 2,200 CS) 420 RPM MAX. SPEED	 100 - 5,000 SSU (22 - 1,050 CS) 520 RPM MAX. SPEED	 100 - 1,000 SSU (22 - 220 CS) 640 RPM MAX. SPEED	 100 SSU (22 CS) 780 RPM MAX. SPEED
---	---	--	--	--

**TORQUE REQUIRED AT 50 PSI (3.45 Bar)**


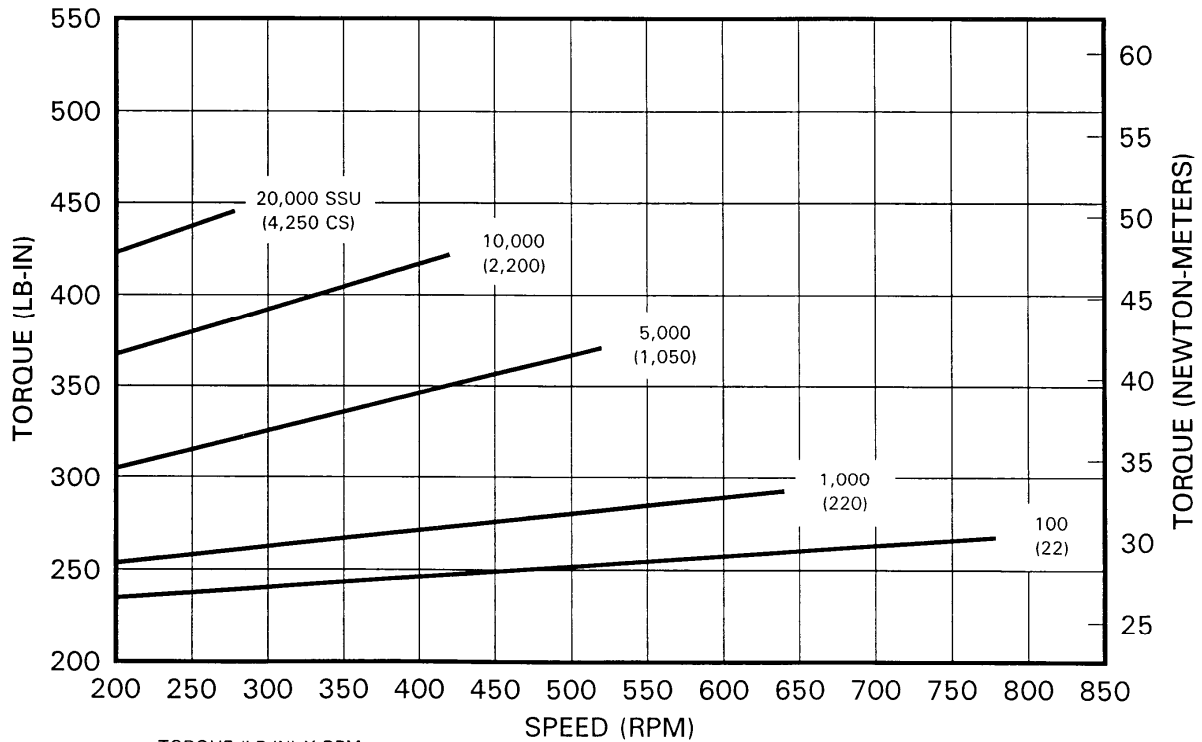


$$HP = \frac{TORQUE (LB-IN) \times RPM}{63025}$$


# CHARACTERISTIC CURVES

Models: TXD2, TXSD2

## FLOW AT 100 PSI (6.89 Bar)

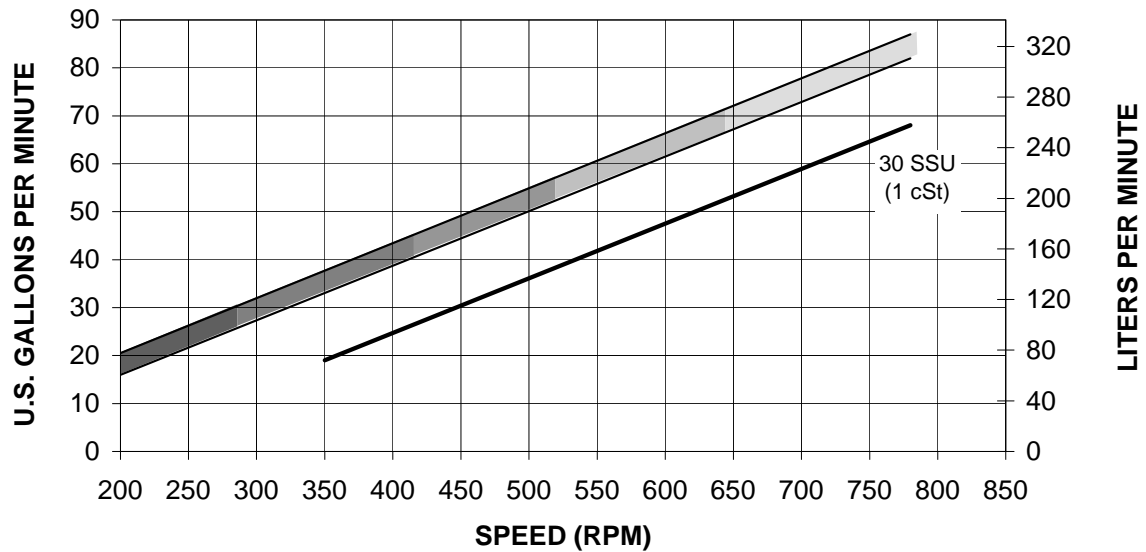

## TORQUE REQUIRED AT 125 PSI (8.62 Bar)

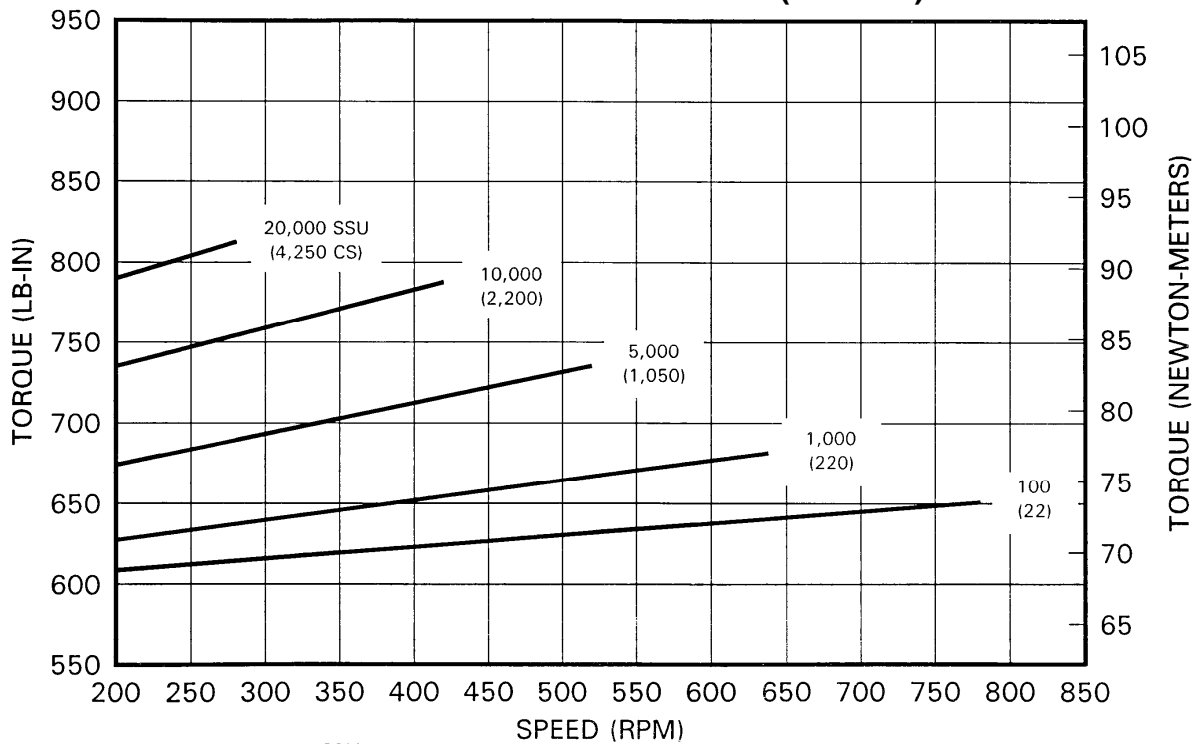

$$HP = \frac{TORQUE (LB-IN) \times RPM}{63025}$$

