


Capacities & Nomenclature

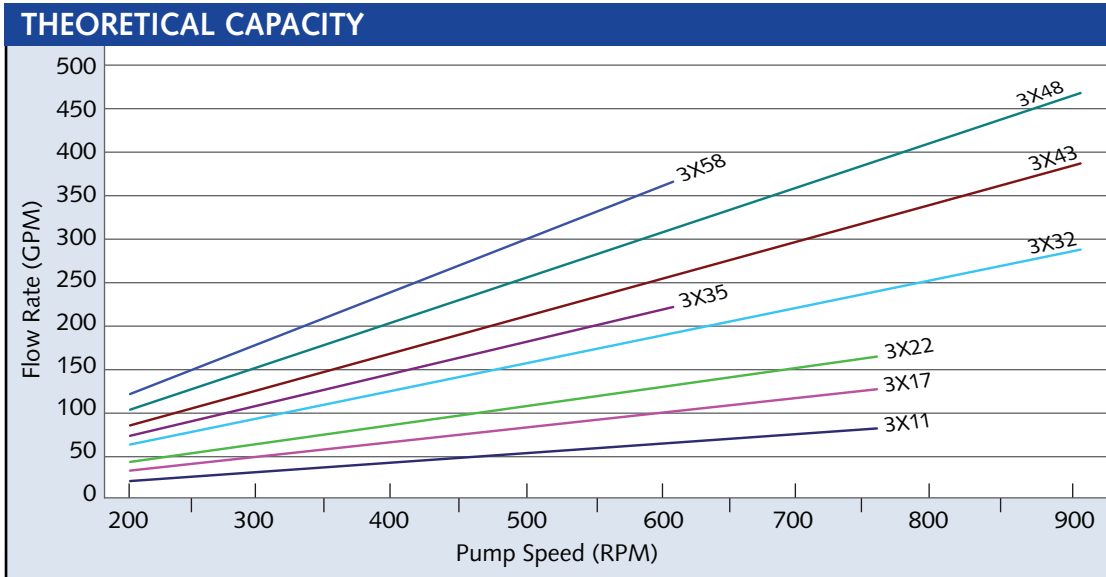

NOMENCLATURE – 3611 G H B F R V			
3	Port Location	3 – Right Angle Ports	
		4 – Straight Through Ports	
6	Seal Option	5 – Triple Lip Seal	
		6 – Packing	
		7 – Mechanical Seal	
		8 – Lip Seal with Ball Bearings	
11	Size	11 – 11 Gal/100 Rev	35 – 35 Gal/100 Rev
		17 – 17 Gal/100 Rev	43 – 43 Gal/100 Rev
		22 – 22 Gal/100 Rev	48 – 52 Gal/100 Rev
		32 – 32 Gal/100 Rev	58 – 58 Gal/100 Rev
Configuration*	H	Pump Head without Outboard Ball Bearing	
	HB	Tapped Port Case with Outboard Ball Bearing	
	HBFB	Flanged Ports with Outboard Bearing	
	HBFRV	Flanged Ports with Outboard Bearing and Relief Valve	
	GHBFVRV	Flanged Ports with Outboard Bearing, Relief Valve, and Gear Reducer	
	BH	Tapped Ports, No Outboard Bearing, Mounting for Hyd. Drive or CCD Bracket	
	BHF	Flanged Ports, No Outboard Bearing, Mounting for Hyd. Drive or CCD Bracket	
BHFRV	Flanged Ports, No Outboard Bearing, Mounting for Hyd. Drive or CCD Bracket, and Relief Valve		

* There are over 40 basic configurations and several thousand custom designs.